


A	Antenna length	76 ± 0.2 mm	2.99 in
B	Antenna width	45 ± 0.2 mm	1.77 in
	Web width	1 label across	
	Pitch		
	Die-cut to edge		
	Core size	76.2 mm	3 in
	PET thickness	0.05 mm	0.002 in
	Aluminum antenna thickness	0.009 mm	0.0003 in

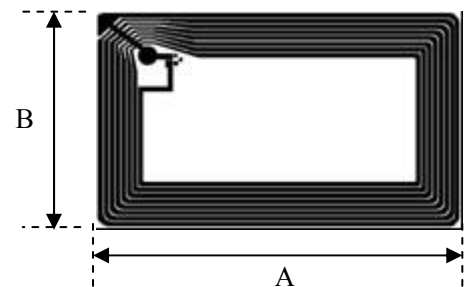

Antenna Size:
 76*45 mm
 2.99*1.77 in

Features

Compliant with ISO15693

Operating frequency 13.56MHz

NXP ICODE-SLIX chip

Environmental

Operating temperature -40°C to +85°C (-40°F to +185°F)

Storage temperature -20°C to +50°C (-4°F to +122°F)

ESD ±2000V peak


Bending diameter >50mm, tension less than 10N

Static pressure <10MPa (10N/mm²)

Shelf life: From the date of manufacture 2 years in 20°C

Protocols supported	ISO15693
Integrated Circuit	NXP ICODE SLIX
Operating frequency	13.56MHz
Memory	

Structure

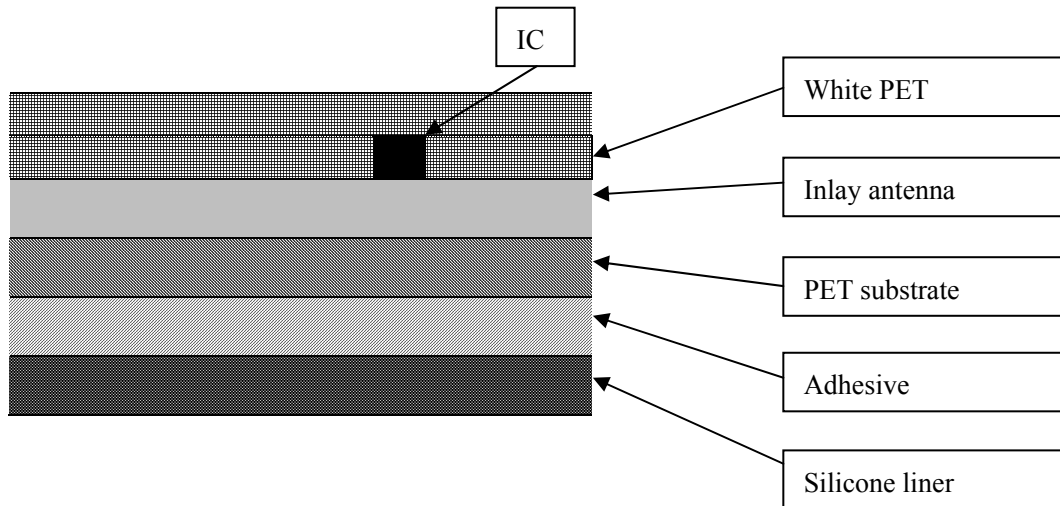

Order Information

Product name	Transit Paperface Inlay
Product number	XCTF-3007A-C38-FPI
Roll size	
Yield rate	≥97%
Final inspection	100%, known faulty ones marked out
Joint	≤ 2 connection each roll, marked in color
Core size	3 inch/76.2 mm
Winding direction	Inlay face outside of the roll.